

STUDY ON THE INFLUENCE OF ETHANOL ON THE SOOT FORMATION IN PREMIXED ETHYLENE FLAMES

Isabel Frenzel¹, Dimosthenis Trimis^{2,1}

¹TU Bergakademie Freiberg, Institute of Thermal Engineering, Freiberg, Germany

²Karlsruhe Institute of Technology, Engler-Bunte-Institute, Division of Combustion Technology, Karlsruhe, Germany

Aim

- Study on influence of ethanol on soot formation in selected fuel-rich atmospheric pressure laminar premixed ethylene/oxygen/argon flames
- Study on influence of residence time (height above the burner HAB), equivalence ratio ϕ and C/O ratio on Particle Size Distribution Functions (PSDFs)
- In-situ probe sampling with suitable gas conditioning and online analysis using a Scanning Mobility Particle Sizer (SMPS)

Investigated ethylene/ethanol flames

- Two series of tests:
 - Ethylene/oxygen/argon flame ($C_2H_4/O_2/Ar = 0.139/0.181/0.680$) at $\phi = 2.3 = \text{const.}$ ($C/O = 0.77$) and stepwise addition of ethanol: 5% - 50% of total carbon feed
 - Ethylene/oxygen/argon flame ($C_2H_4/O_2/Ar = 0.128/0.183/0.689$) at $C/O = 0.7 = \text{const.}$ ($\phi = 2.1$) and stepwise addition of ethanol: 5% - 30% of total carbon feed
- Inlet gas temperature of 323 K, atmospheric pressure, cold gas velocity of 8 cm/s (at 273 K and 1 atm)

Experimental setup

- Oil-cooled flat flame model burner (McKenna burner [1]) with bronze plug ($\varnothing 60$ mm) and N_2 -shroud
- Stabilization plate at HAB = 30 mm
- Fluid supply via Bronkhorst MFCs ($\Delta\phi = \pm 0.03$)
- Direct evaporator for liquid fuel (type aSTEAM from aDROP GmbH)
- Mixing of fuel and oxidizer via special mixing chamber
- Conditioning of reactants at 323 K after evaporating the liquid fuel at higher temperature
- Sample probe ($Al_2O_3 > 99.5\%$, 9 mm ID, 10 mm OD) with $\varnothing 0.3$ mm orifice
- Dilution ratio $\sim 2 \cdot 10^4$ (uncertainty $< \pm 24\%$)
- Type S thermocouple ($\varnothing 0.5$ mm, $\Delta T = \pm 80$ K) for temperature measurement

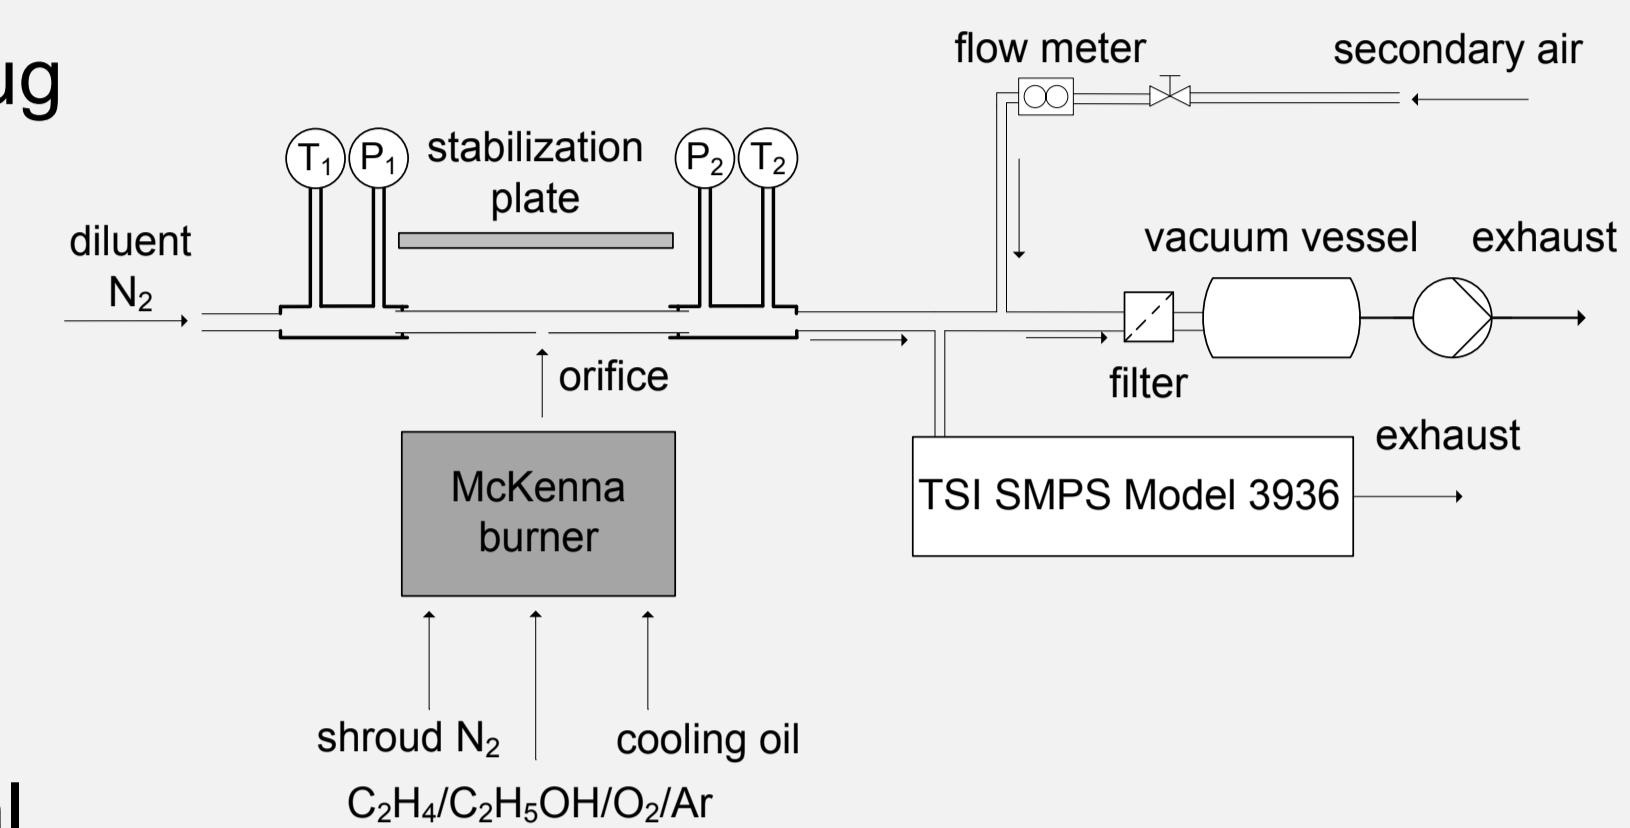


Figure 1. Schematic of experimental setup (similar to [2])

Results for ethylene/ethanol flames with constant $\phi = 2.3$

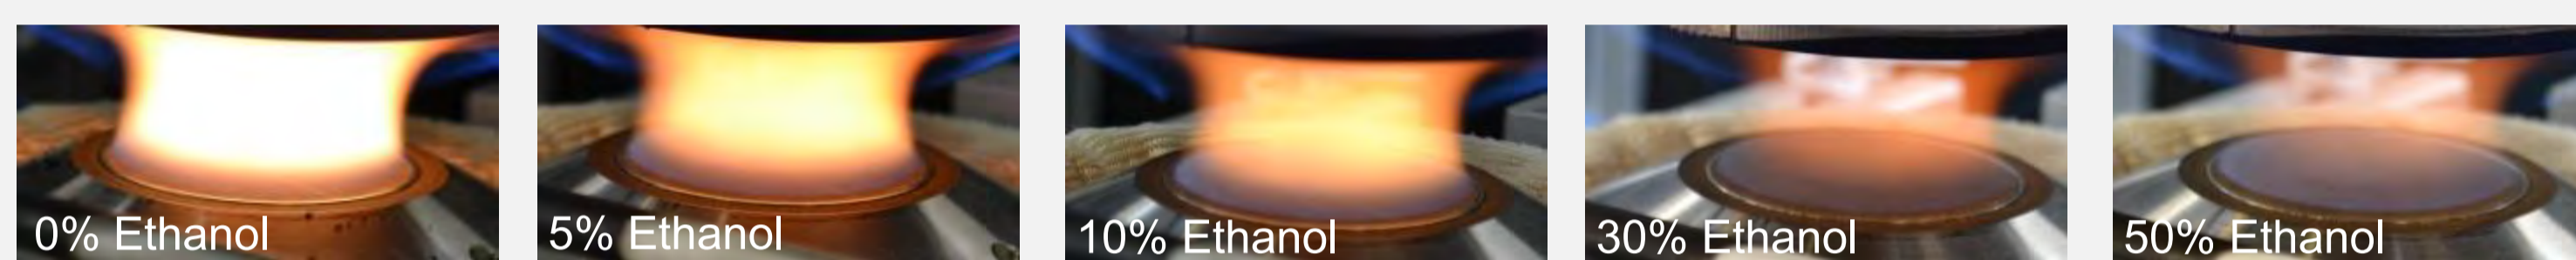


Figure 2. Pictures of ethylene/ethanol flames with different ethanol percentage of the total carbon feed at constant equivalence ratio ($\phi = 2.3$)

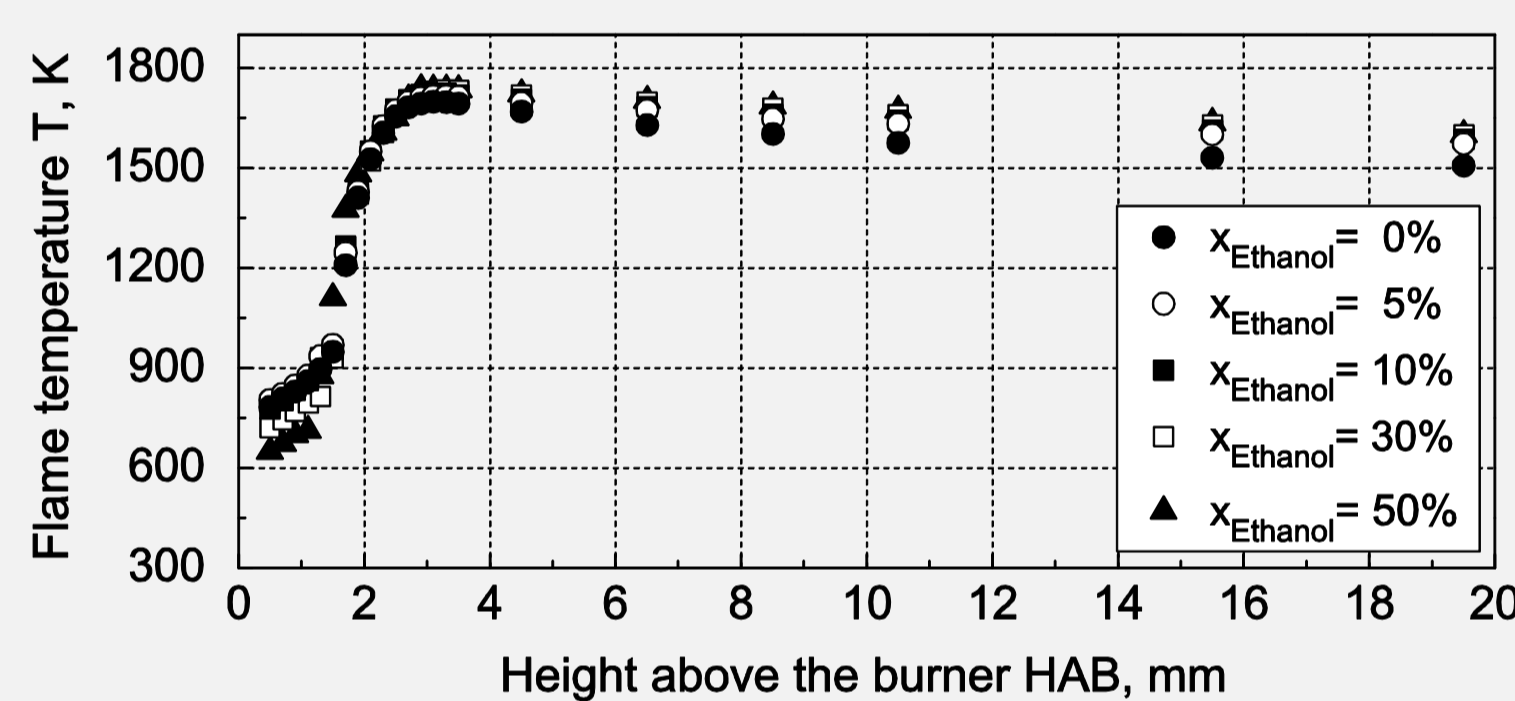


Figure 3. Radiation-corrected axial flame temperature profiles in ethylene/ethanol flames at constant equivalence ratio ($\phi = 2.3$)

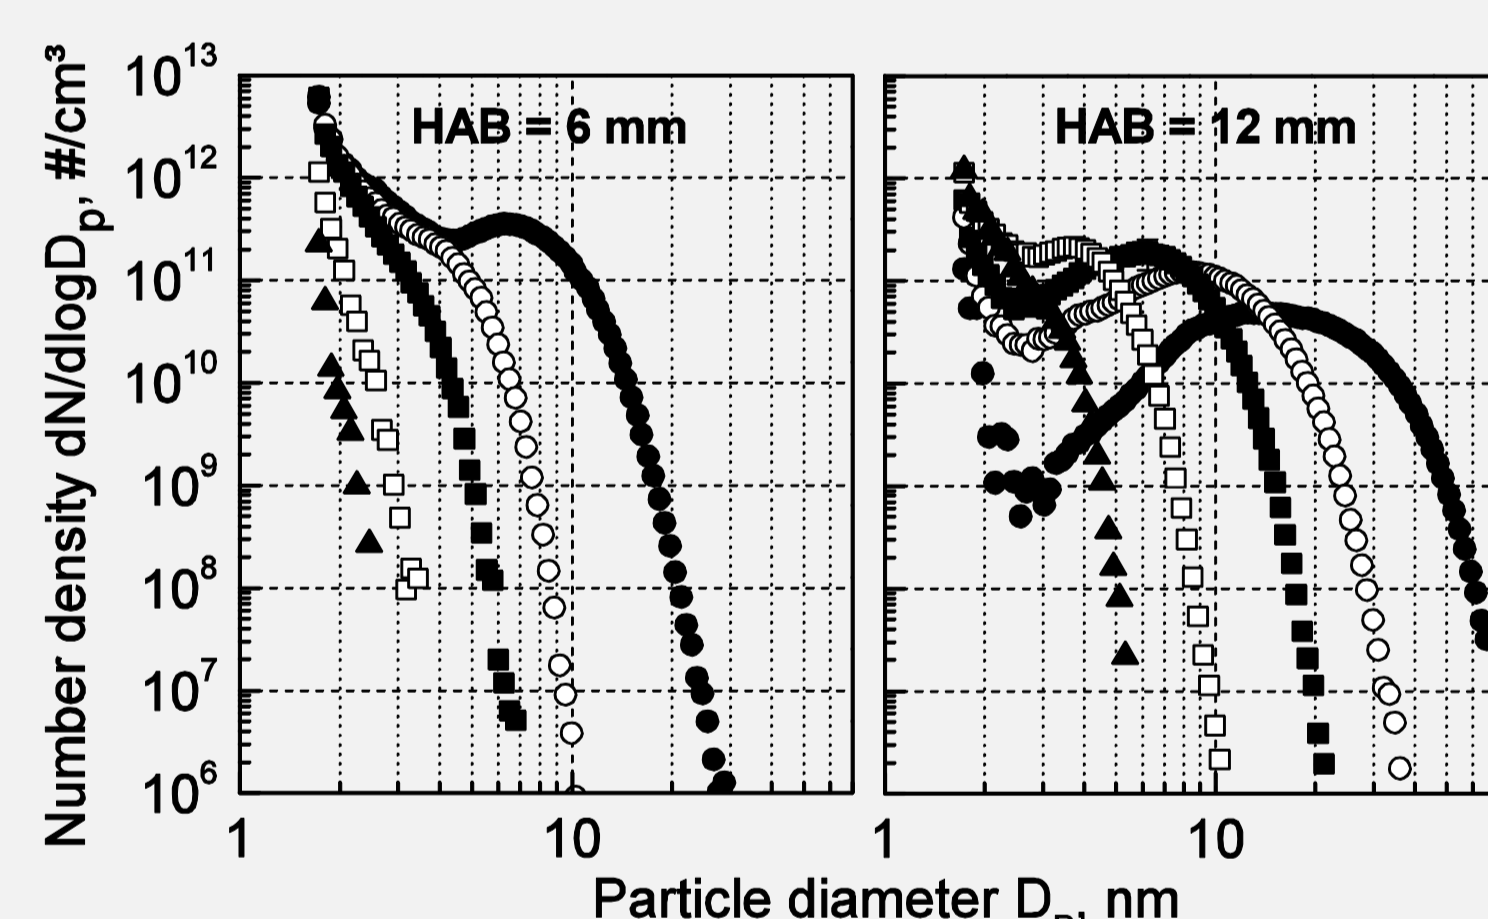


Figure 4. Variation of PSDFs in ethylene/ethanol flames at constant equivalence ratio ($\phi = 2.3$) at HAB=6 mm and HAB=12 mm

- Flame temperatures are similar independent of ethanol content
- With increasing ethanol content shift of PSDs to smaller diameters ($x_{Ethanol} = 50\%$ at HAB = 12 mm: bimodal \rightarrow unimodal)
- Ethanol doped flame undergoes a slow down process on soot formation
- Observed effects are consistent with results obtained by others [3, 4]

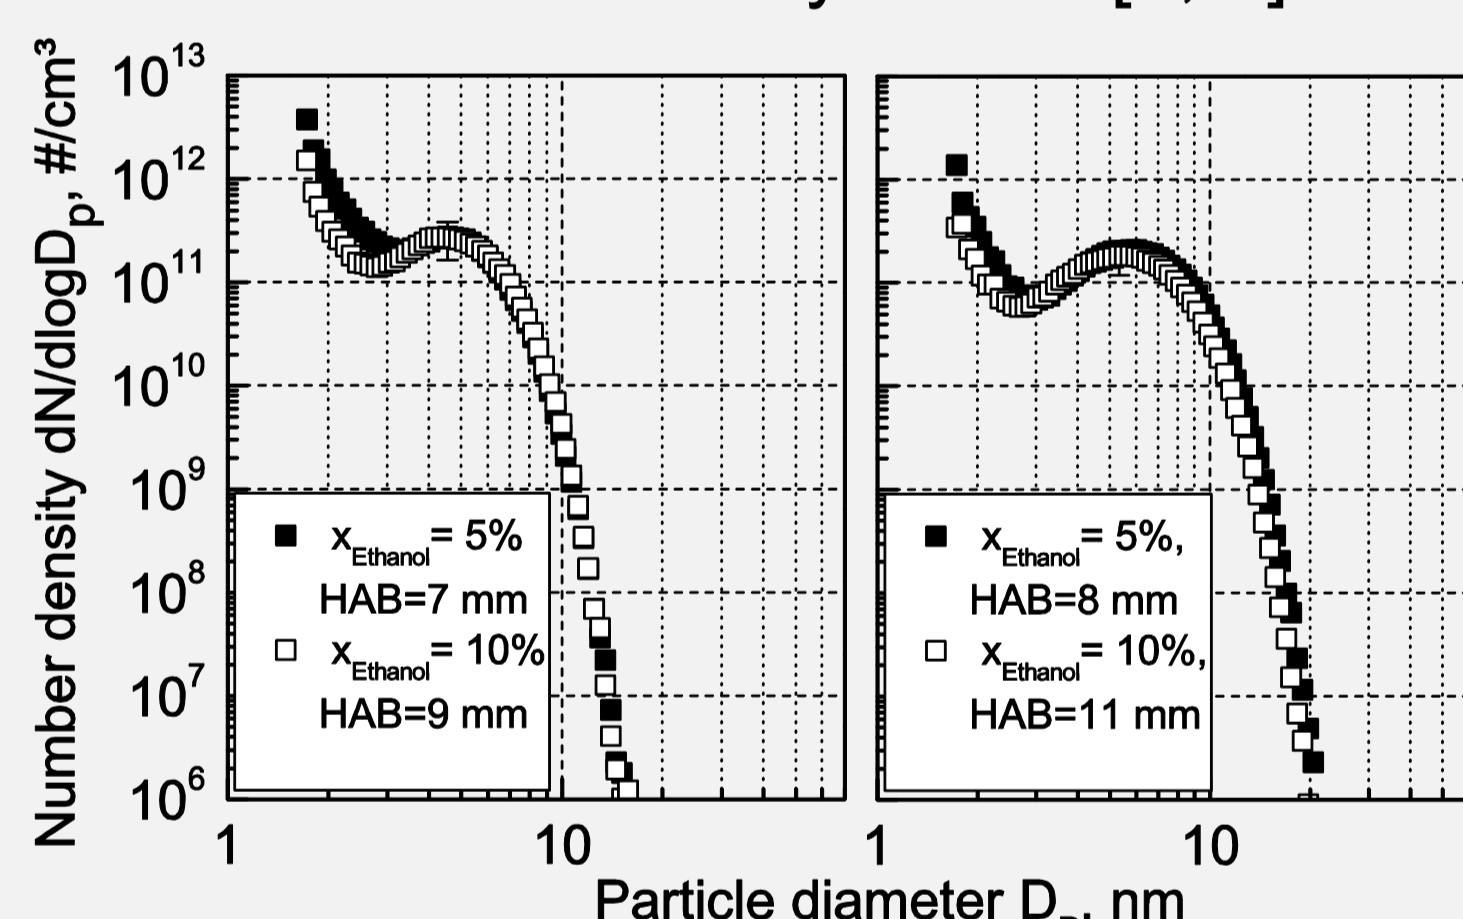


Figure 5. Comparison between similar PSDFs in ethylene/ethanol flames with 5% and 10% ethanol percentage of the total carbon feed at constant equivalence ratio ($\phi = 2.3$) at different HABs

Results for ethylene/ethanol flames with $\phi = 2.2/2.3/2.4$

- Reduction of soot volume with increasing ethanol content in the fuel
- Already 5% of ethanol in the fuel have a significant influence on the soot formation
- Tendency of soot reduction induced by ethanol addition increases at lower equivalence ratios

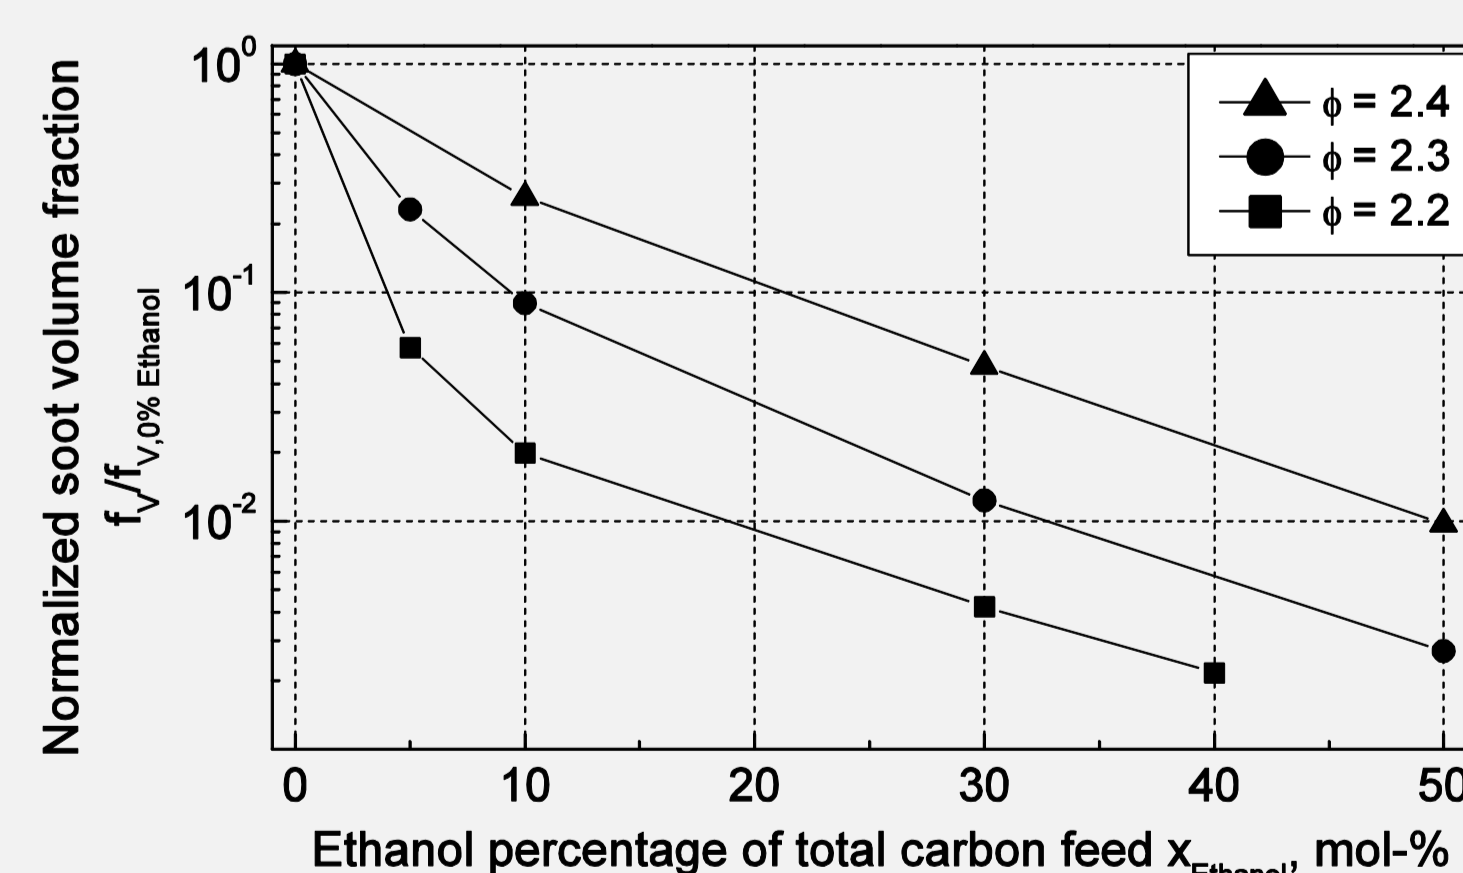


Figure 6. Soot volume fractions of ethylene/ethanol flames normalized with soot volume fractions of pure ethylene flames as function of ethanol percentage of total carbon feed with different equivalence ratios ($\phi = 2.2/2.3/2.4$) at HAB = 10 mm

Results for ethylene/ethanol flames with constant C/O ratio = 0.7

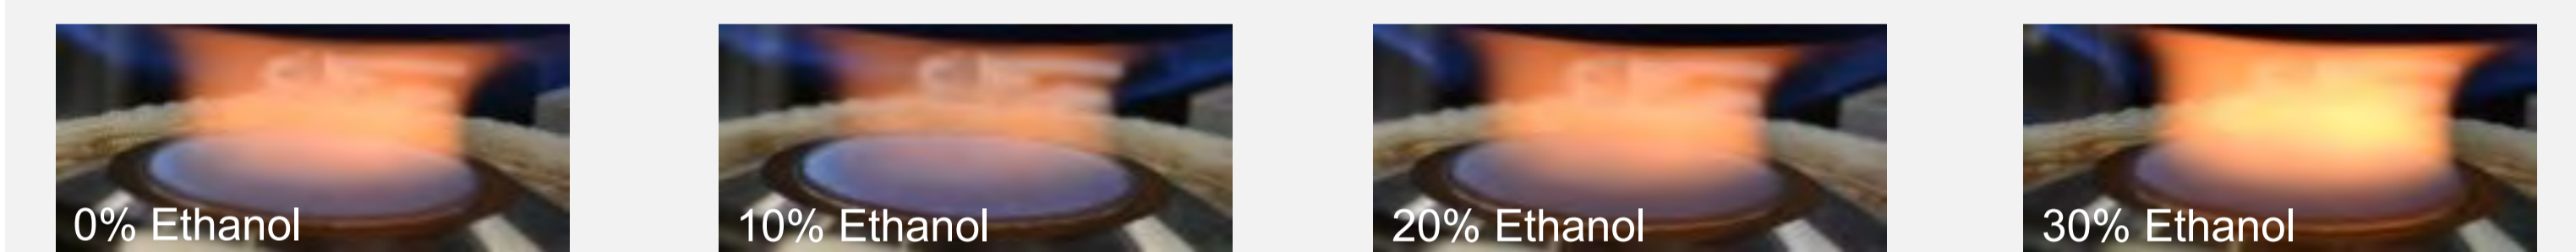


Figure 7. Pictures of ethylene/ethanol flames with different ethanol percentage of the total carbon feed at constant C/O ratio ($C/O = 0.7$)

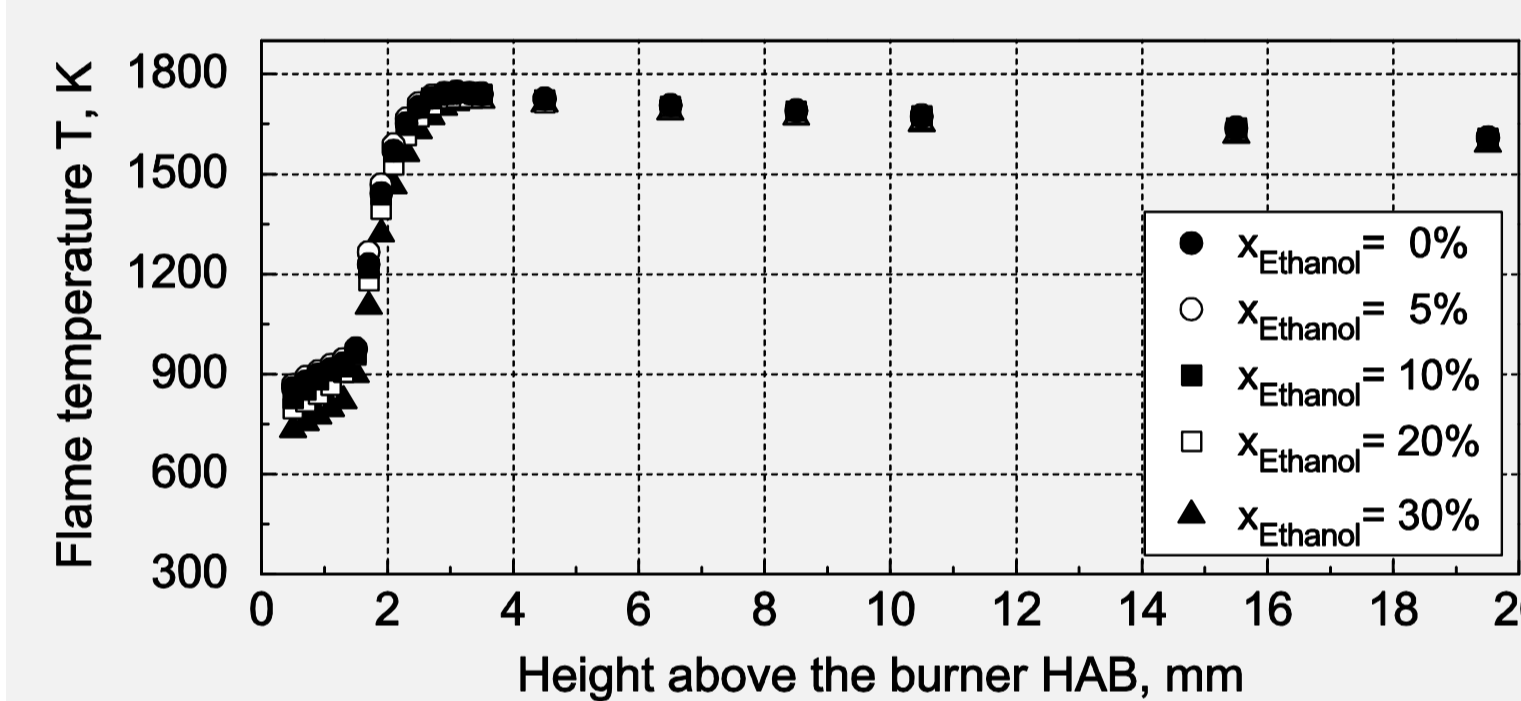


Figure 8. Radiation-corrected axial flame temperature profiles in ethylene/ethanol flames at constant C/O ratio ($C/O = 0.7$)

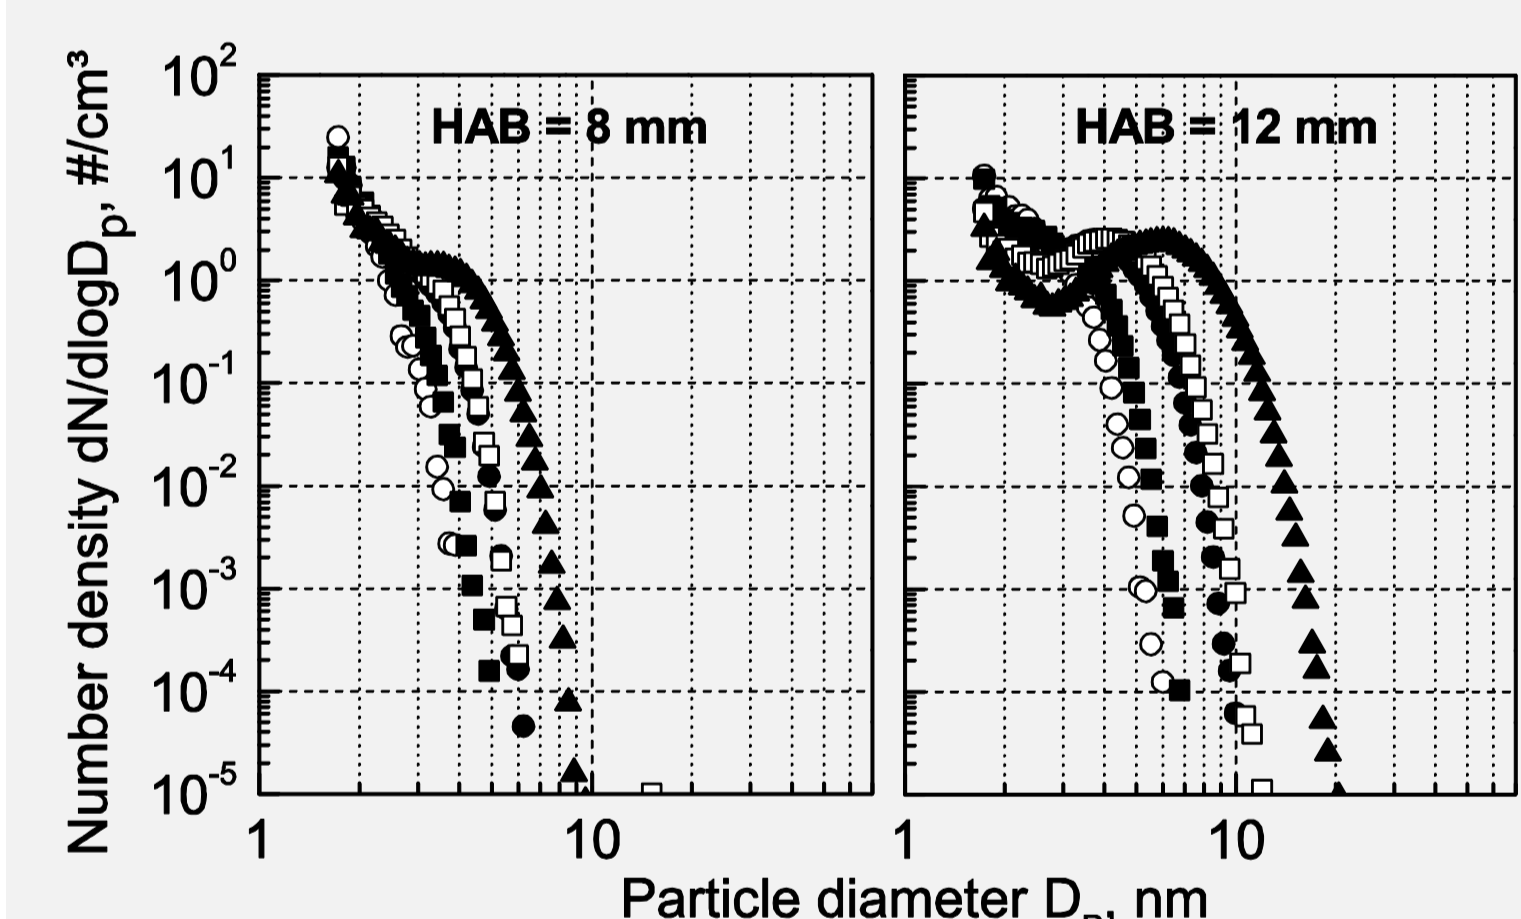


Figure 9. Variation of PSDFs in ethylene/ethanol flames at constant C/O ratio ($C/O = 0.7$) at HAB = 8 mm and HAB = 12 mm

- Flame temperatures are similar independent of ethanol content
- With higher amounts of ethanol and constant C/O ratio ϕ is increasing and therefore soot formation increases
- However, PSDFs in pure ethylene flame ($\phi = 2.1$) and in flame with 20% ethanol ($\phi = 2.26$) are quite similar
- Effect mainly due to fuel structure? (heteroatom O in ethanol)

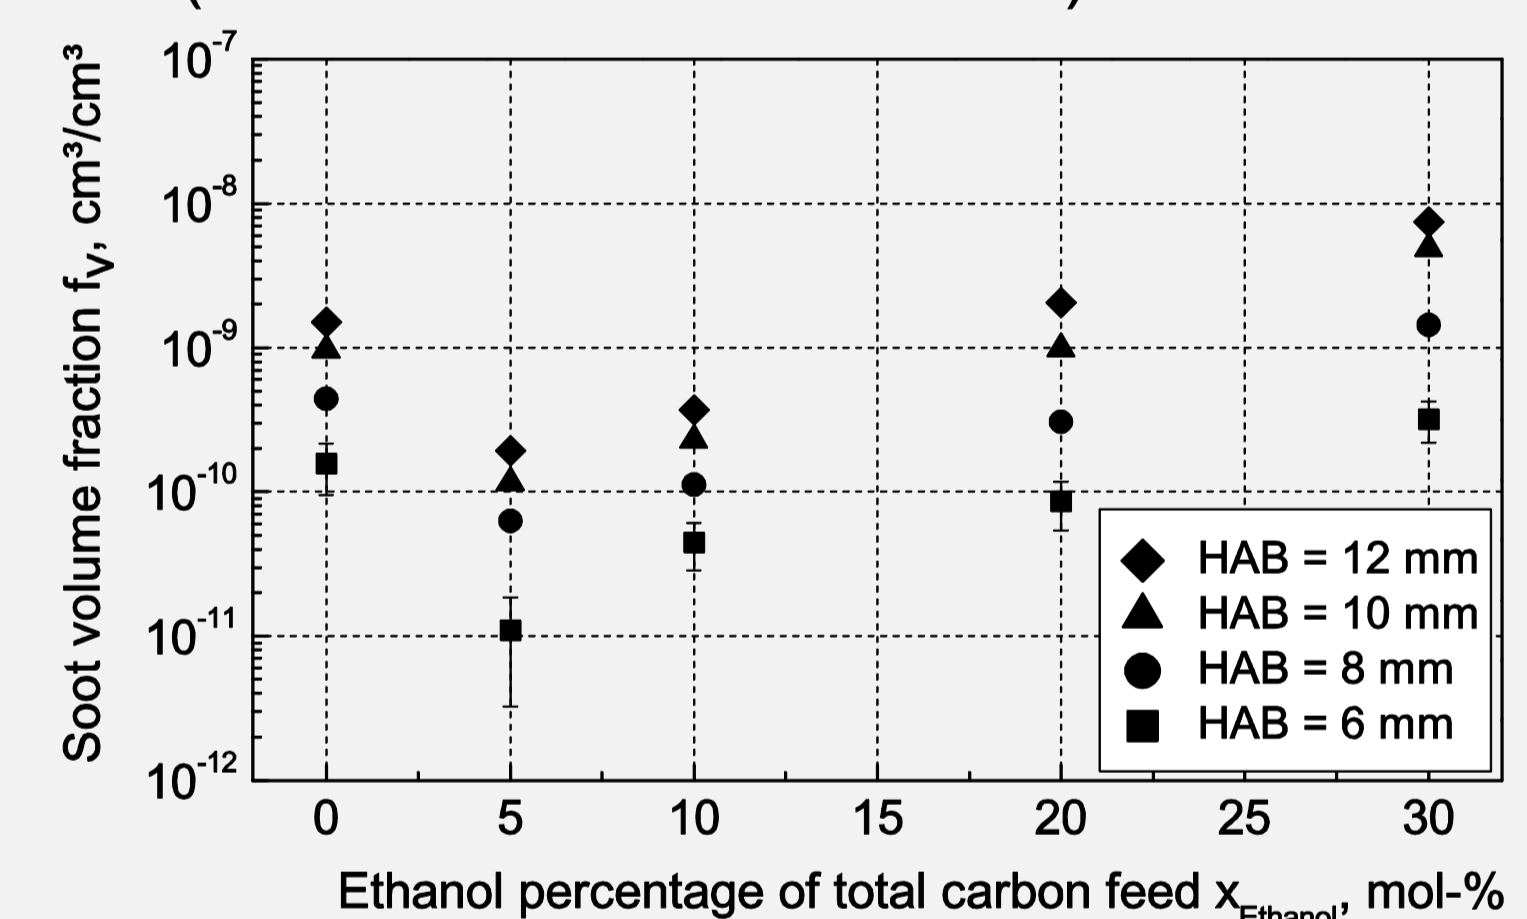


Figure 10. Soot volume fractions of ethylene/ethanol flames as function of ethanol percentage of total carbon feed with constant C/O ratio ($C/O = 0.7$) at four different HABs.

Conclusions

- Addition of ethanol to the fuel leads to a reduction of the soot formation
- For constant equivalence ratio the PSDFs are bimodal in pure ethylene flames and in flames with an ethanol content of $< 50\%$, even for HAB = 12 mm; for 50% ethanol content the PSDFs become unimodal
- The tendency of the reduction of soot formation due to the addition of ethanol is more distinct at low equivalence ratios
- For constant C/O ratio soot formation is increasing with higher amounts of ethanol in the fuel due to the fact that the equivalence ratio increases
- However, the PSDFs in the flame with 20% ethanol and in the pure ethylene flame are quite similar, what leads to the assumption that mainly the fuel structure influences the soot formation

Acknowledgements

The authors gratefully acknowledge the financial support by the Federal Ministry of Food and Agriculture in the project "Bildung von Rußpartikeln und katalytische Filterregeneration bei der motorischen Nutzung von Ottokraftstoffen aus Biomasse" (project number 22041111).

References:

- [1] The McKenna Flat Flame Burner, Holthius & Associates, P.O. Box 1531, Sebastopol, CA 95473.
[2] B. Zhao et al., Aerosol Sci. Technol. 37 (2003) 611-620.

- [3] M. Salamanca et al., Experimental Thermal and Fluid Science 43 (2012) 71-75.
[4] J. Wu et al., Combustion and Flame 144 (2006) 675-687.

Dipl.-Ing. Isabel Frenzel

TU Bergakademie Freiberg | Institute of Thermal Engineering | Chair of Gas and Heat Technology | Gustav-Zeuner-Str. 7 | 09599 Freiberg | Germany
Phone: +49 3731 393013 | Fax: +49 3731 393942 | isabel.frenzel@iwtt.tu-freiberg.de | www.gwa.tu-freiberg.de