

Gasoline Vehicle Exhaust Particle Sampling Study

**David Kittelson, Winthrop Watts, Jason Johnson
University of Minnesota**

**Jamie Schauer
University of Wisconsin**

**Adelheid Kasper, Urs Baltensperger, Heinz Burtscher
Paul Scherrer Institute
and the
University of Applied Sciences – Switzerland**

Ricardo, Inc.

**7th ETH Conference on Combustion Generated Particles
Zurich, 18th - 20th August 2003**

We gratefully acknowledge the support of the U.S. Department of Energy, Office of Heavy-Duty Vehicles, Dr. James Eberhardt, Manager

Outline – Spark Ignition PM emissions

- On-road chase
- Chassis dynamometer
 - Physical measurements
 - Chemistry
- Simulated “smoker”
- Weekend vs. weekday
- Cold start and idle
- Conclusions


MEL Built During The CRC E-43 Project




- Instrumentation
 - SMPS to size particles in 9 to 300 nm size range
 - 3025A CPC to count all particles larger than 3 nm with leaky filter dilutor
 - Diffusion Charger to measure total submicron particle surface area
 - PAS to measure total submicron surface bound PAH equivalent
 - CO₂, CO, and NO ambient gas analyzers
 - ECOM AC for exhaust gas analysis

On-Highway Chase Experiments - Comparison of Diesel and Gasoline Size Distributions during Hard Accelerations

Chase Test Acceleration Size Distributions by Vehicle
(Background and CO₂ Dilution Ratio Corrected)

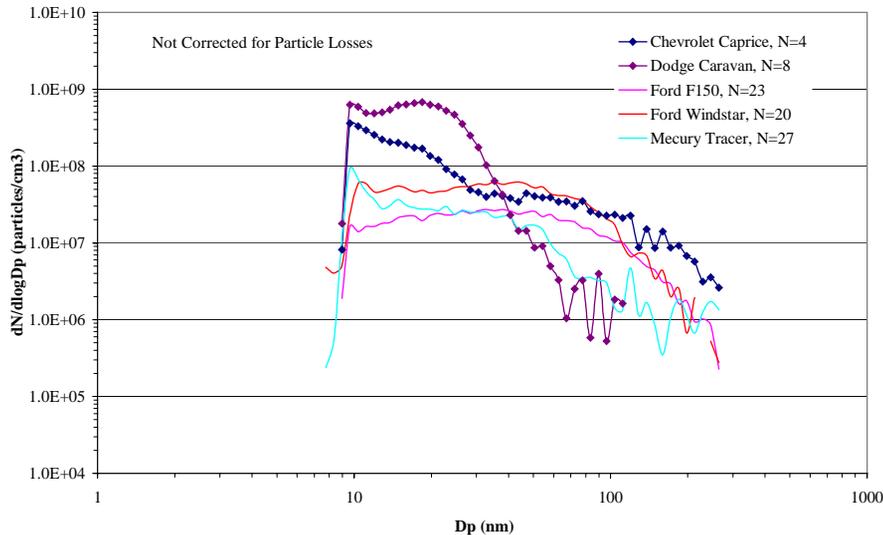


Caterpillar On-Road Acceleration, 3406E (electronic) and 3406C (mechanical) Engines (background and NO dilution ratio corrected)

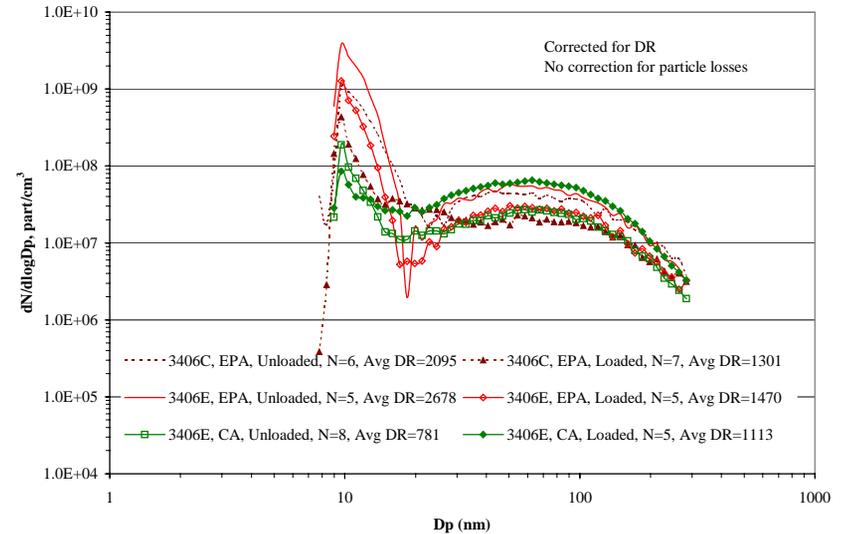

- Under steady highway cruise conditions we could not measure a significant particle signature above background for gasoline engines
- However, during hard accelerations, size distributions for gasoline light-duty vehicles were surprisingly similar to modern heavy-duty Diesel vehicles
- Generally gasoline engines have somewhat lower concentrations in the upper end of the accumulation mode where most of the particle mass is found, thus they have lower mass emissions

On-Road Chase Experiments - Number Emissions during 50 to 70 MPH Hard Accelerations

CPC number ($D > 3\text{nm}$), SMPS number ($D > 10\text{nm}$)

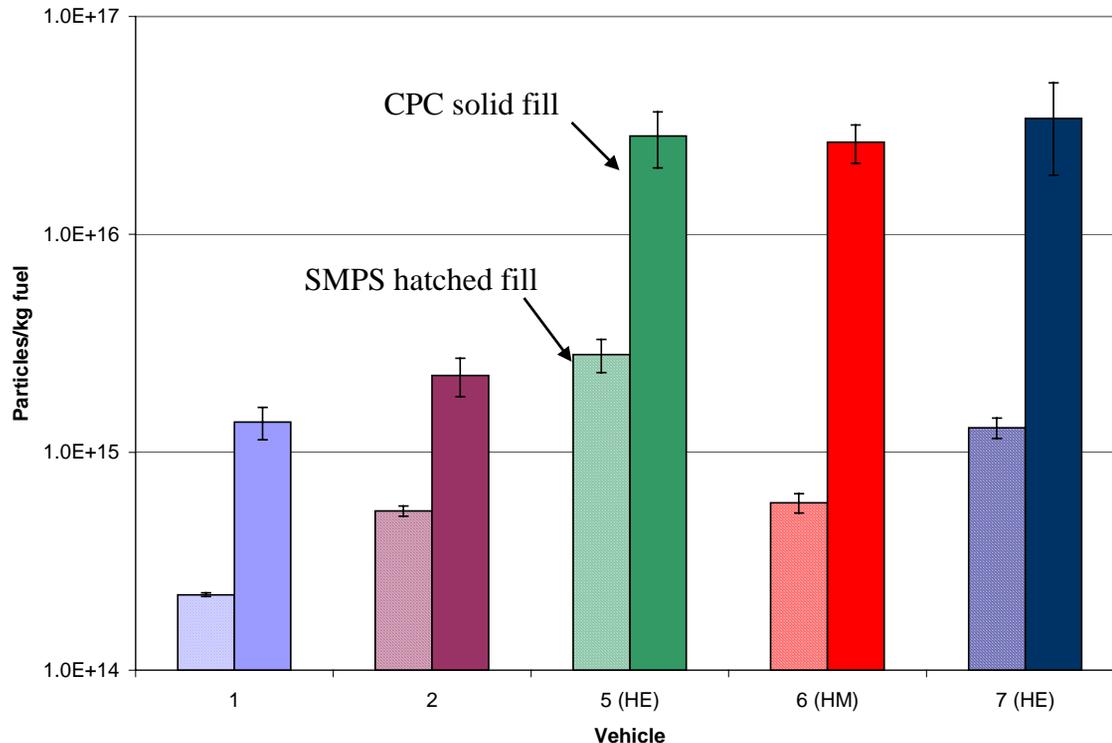

- Vehicles 1 and 2 were low mileage normal emitters, 5 and 7 were worn blue smokers, vehicle 6 was high mileage
- Fuel specific number emissions range from 2×10^{14} to 3×10^{16} particles/kg fuel
- Many particles below sizing range of conventional SMPS - Emissions of extremely small particles, $D > 3 < 10$ nm, are often more than an order of magnitude higher than emissions of particles for $D > 10$ nm


Outline – Spark Ignition PM emissions

- On-road chase
- Chassis dynamometer
 - Physical measurements
 - Chemistry
- Simulated “smoker”
- Weekend vs. weekday
- Cold start and idle
- Conclusions


Objective 2

- Compare the information obtained from on-road tests to a small subset of light-duty gasoline vehicles tested on a chassis dynamometer with a dilution tunnel using the Unified Drive Cycle, at both room temperature and 30° F.
- Hot and cold cold start UDCs and steady state conditions evaluated
- Use instruments from MEL plus filter and impactor samples for PM_{2.5} and chemistry
- Specially designed dilution system, CVS with dilution at tailpipe

Cold Cold Start Size Classified UDCs - Escort

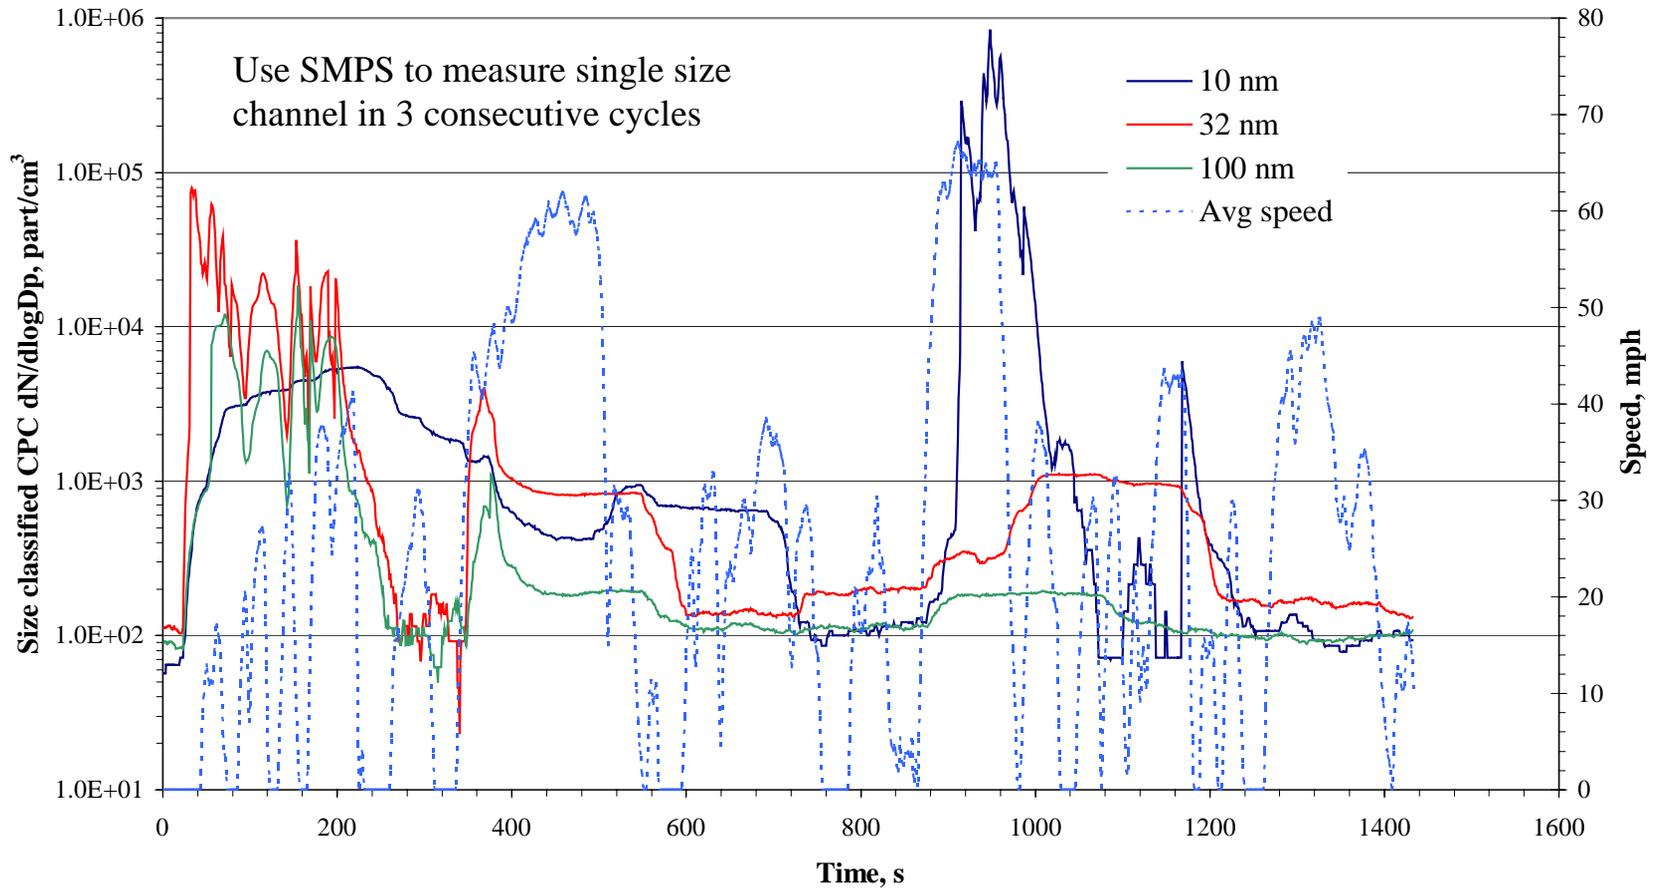


Chassis Dynamometer Tests – Unified Cycle CPC Number Emissions ($D_p > 3 \text{ nm}$)

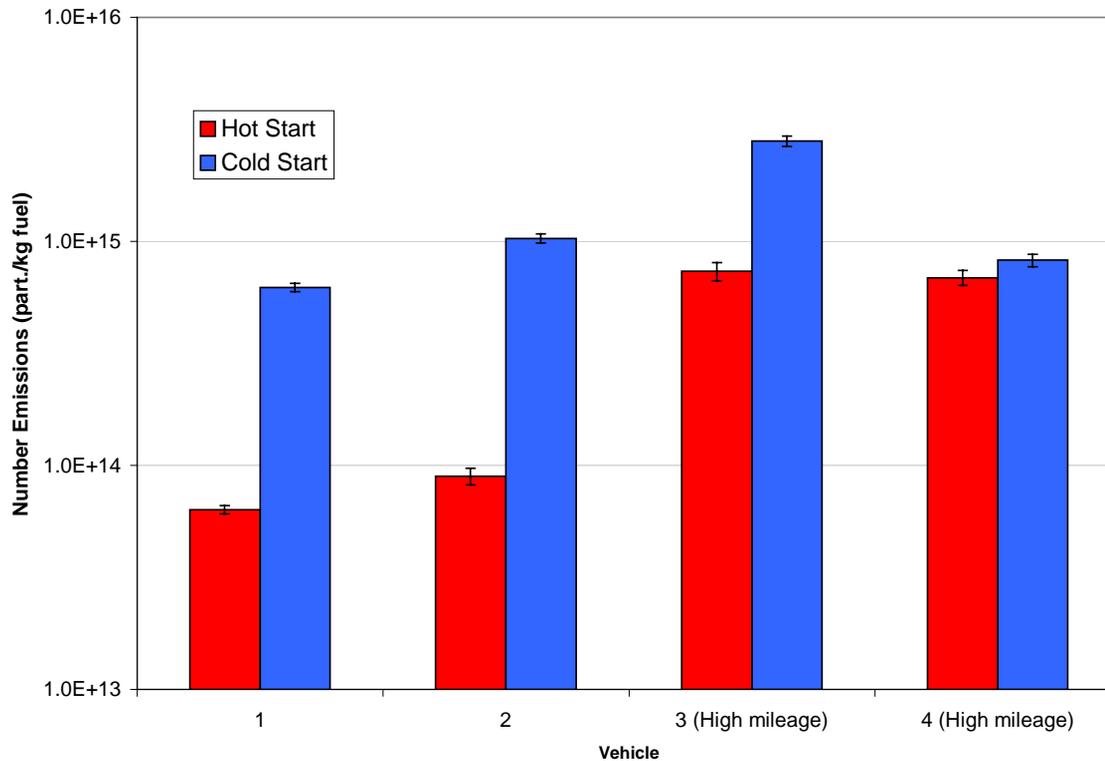

- Number emissions much higher in cold start cycle, particularly with low mileage vehicles
- Fuel specific emissions range from 6×10^{13} to 3×10^{15}

Unified Cycle Test Size Distributions

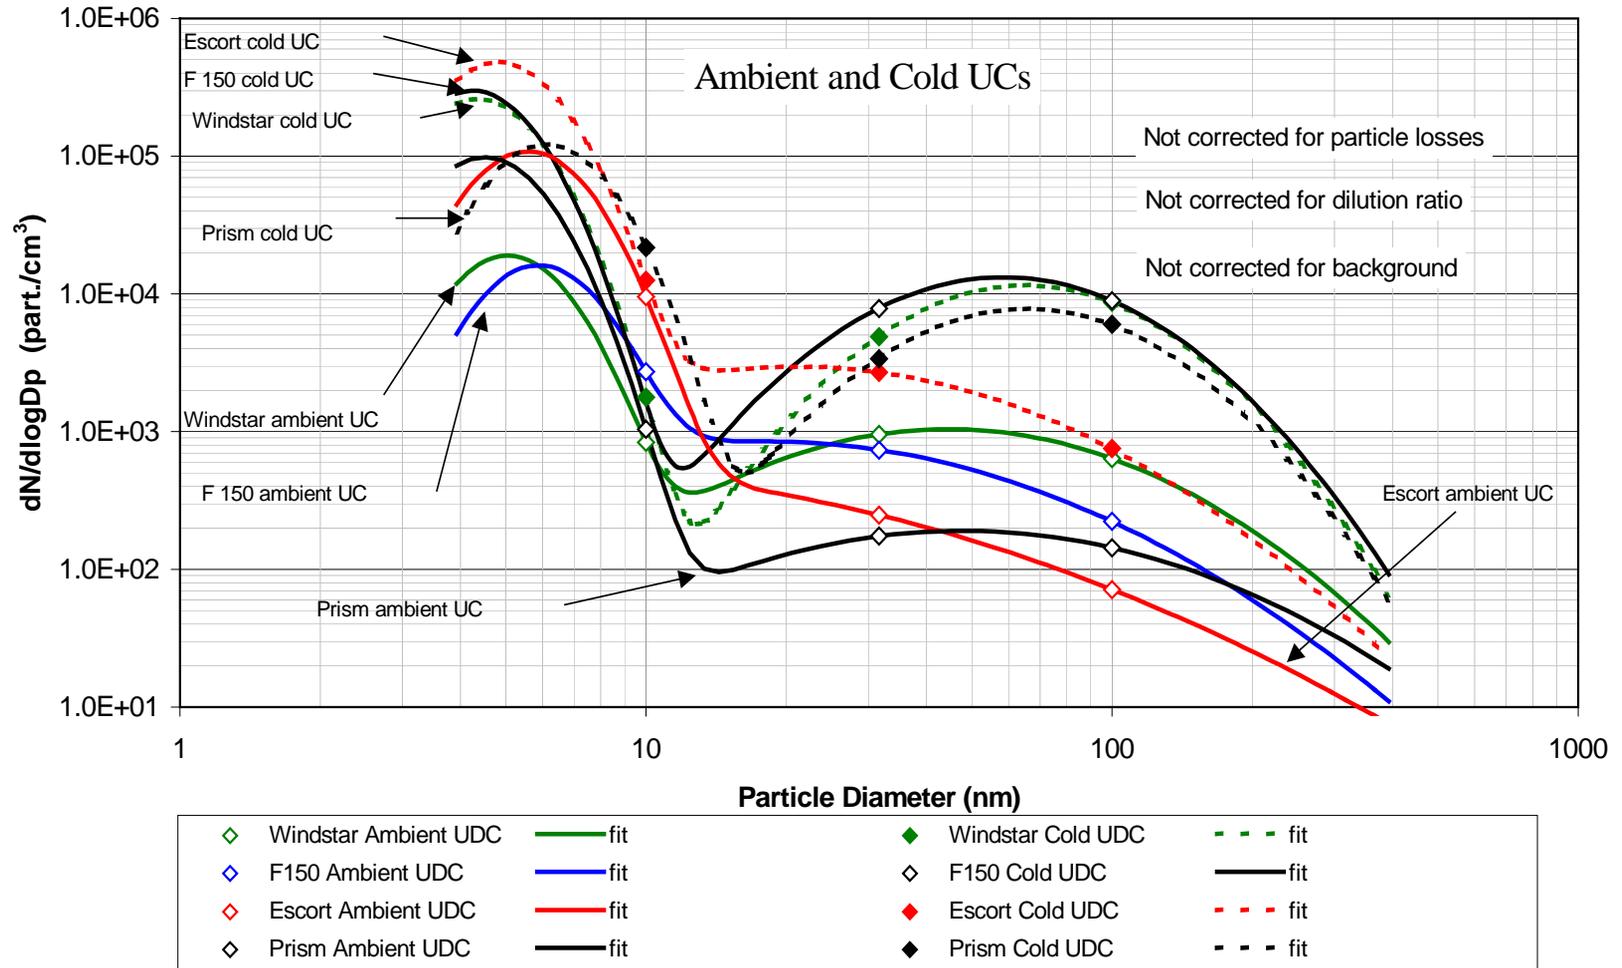

Summary UDC Test Trends


- Highest number concentrations measured at peak vehicle speed (70 mph)
- Cold cold start emissions consistent from test to test
 - During the cold cold start test larger particles are emitted early in the cycle when the vehicle is warming up at low speeds
 - Larger concentration in accumulation mode consistent with higher mass emissions
- Hot start emissions (CPC) decreased from test to test
 - 10 nm particles are emitted early in the cycle.
 - The order of the sampling was always the same during the hot start tests (10, 32, and 100 nm). This may have introduced a bias into the results because it would be expected that the vehicle would be warmer for each hot start test.

Chassis Dynamometer Steady-State Data Conditions


- The steady-state operating condition included
 - 2 hrs at 65 mph
 - 1 hr at 35 mph
- Approximately one hour composed of four 10-15 min periods
 - Idle
 - 70 mph
 - 20 mph
 - 70 mph

Total Number Concentrations, Storage and Release With Decaying (Except for Unusual Emitters) Emissions of Sub 10 nm Particles


Ford F-150 at Steady State Cruise, Particles Per Mile
11-6-2001

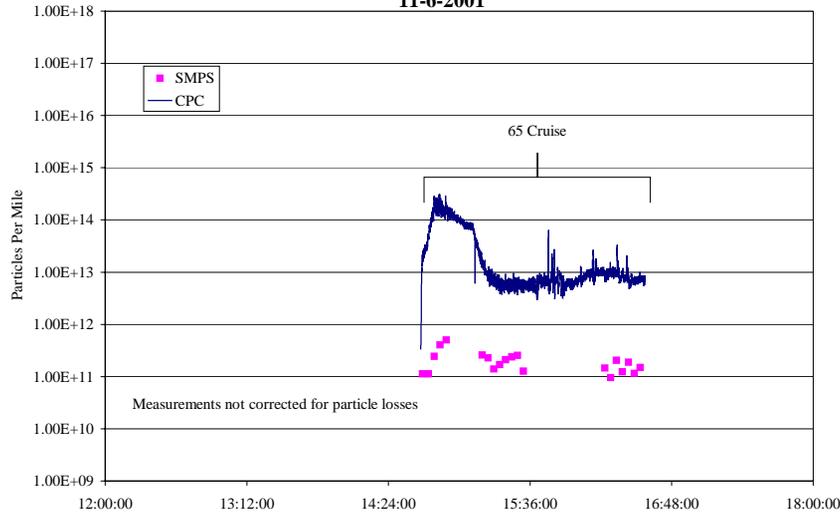


Ford Windstar at Steady State Cruise, Particles Per Mile
11-8-2001

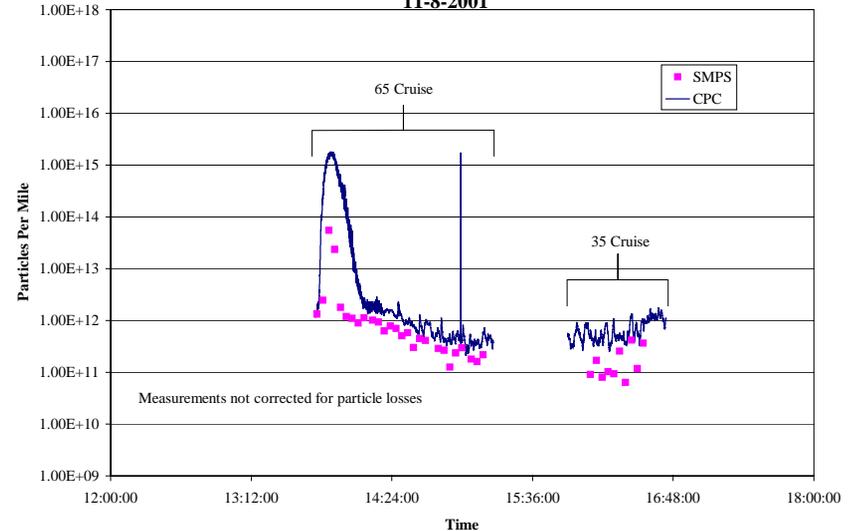



Ford Escort at Steady State Cruise, Particles Per Mile
11-12-2001

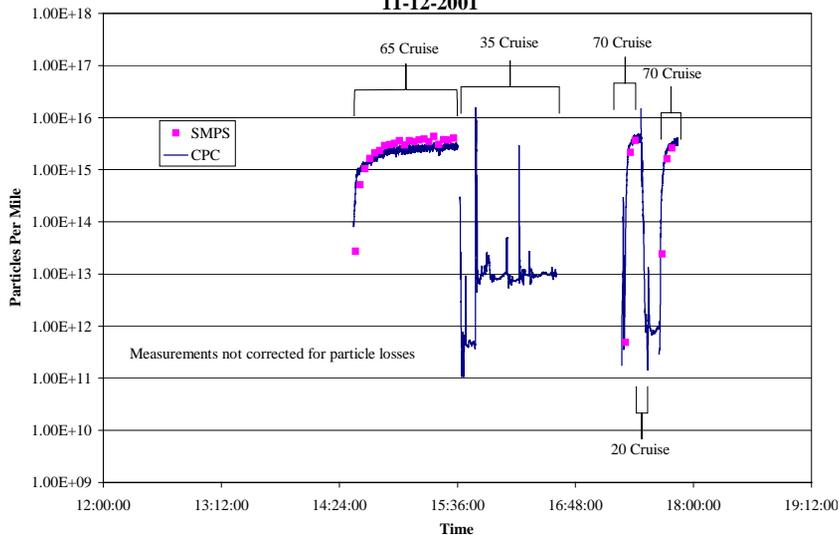

Chevrolet Prism at Steady State Cruise, Particles Per Mile
11-14-2001

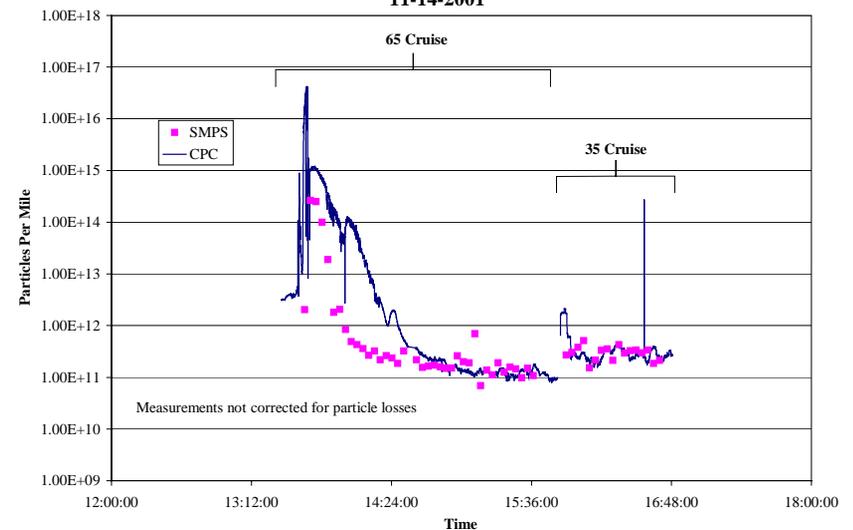


Chassis Dynamometer Tests – SMPS Measurements during Steady-State Tests

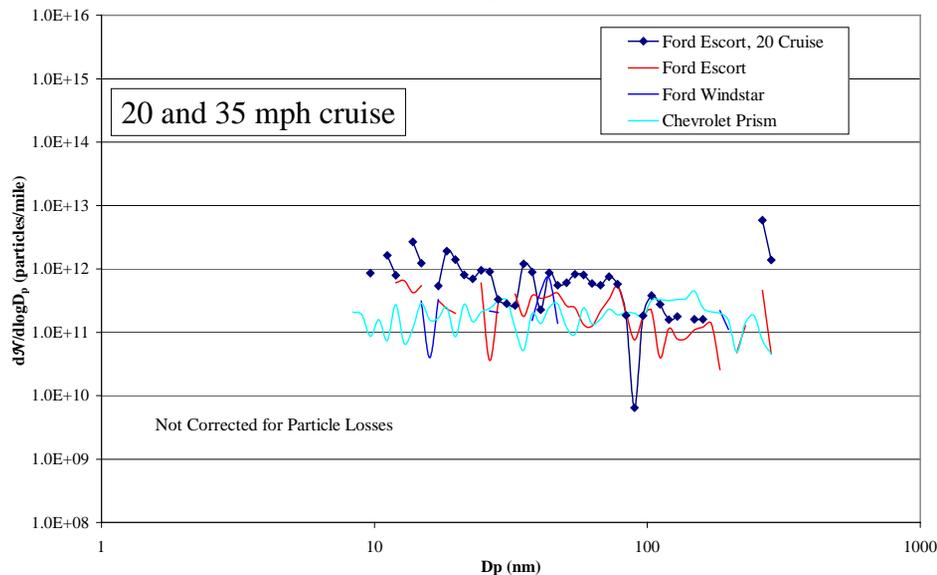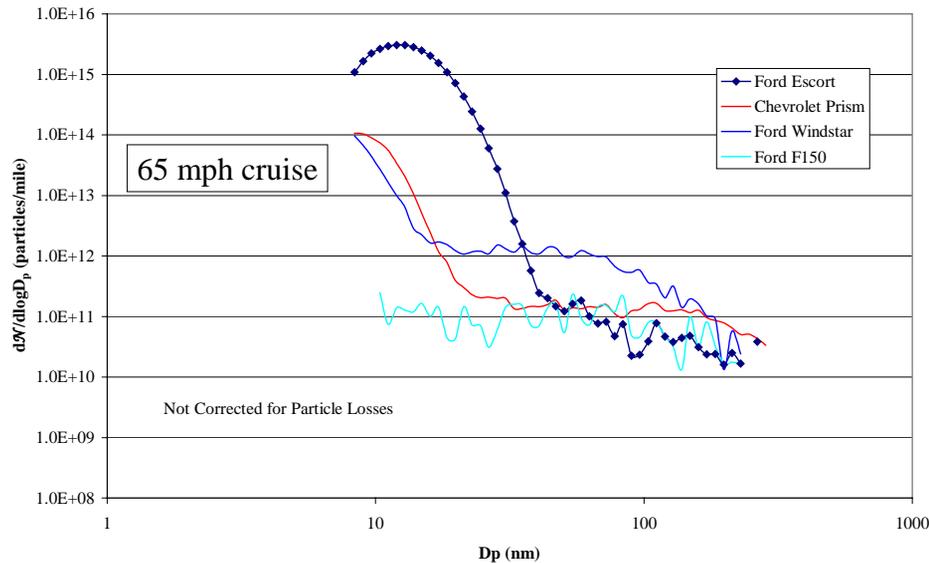

- Number emissions above 10 nm are very low at low speed cruise
- High speed cruise leads to much higher emissions in this size range
 - Most of these emissions occur in the first few minutes after accelerating to high speed for 3 of the 4 vehicles tested. This is apparently due to storage and release effects
 - One unusual emitter showed the opposite trend with emissions growing with time
- Simultaneous CPC measurements show that for most of these vehicles there are many particles below 10 nm


Chassis Dynamometer Tests - State Number Emissions

CPC number ($D > 3\text{nm}$), SMPS number ($D > 10\text{nm}$)

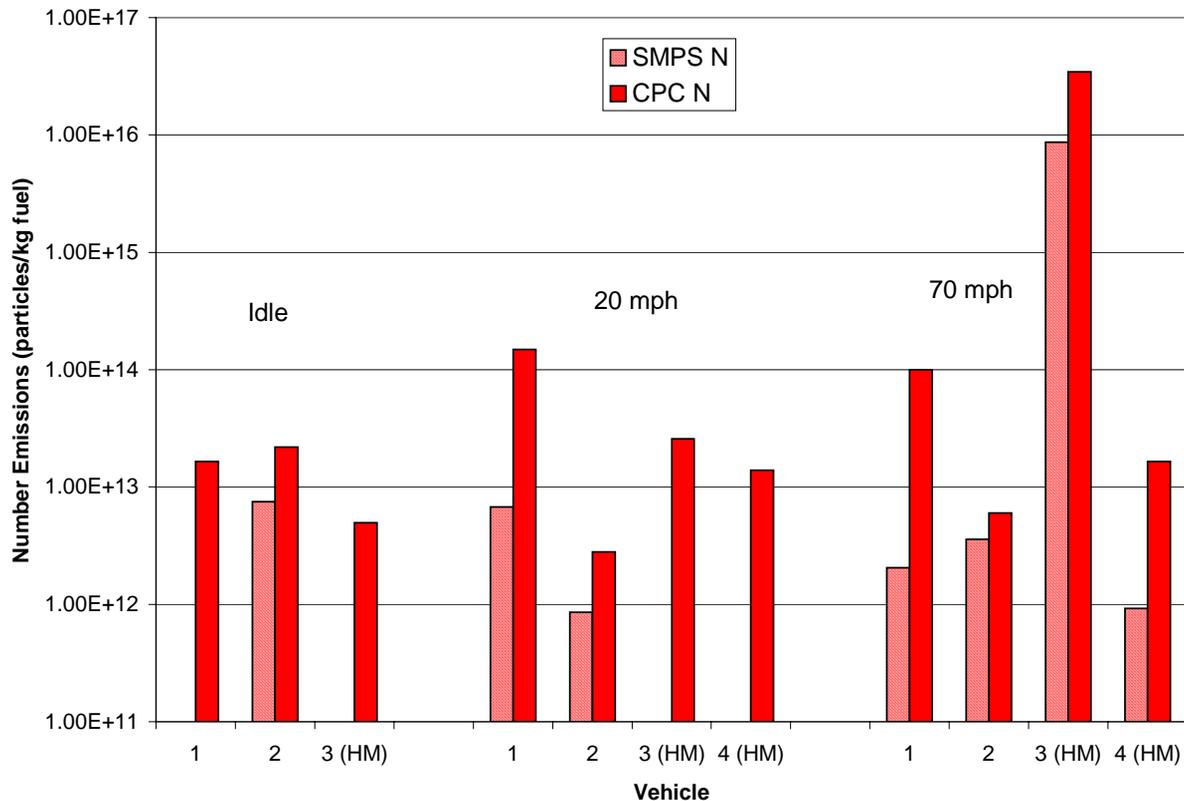


- Number emissions are much higher at high speed, mainly in transient storage and release mode
- Fuel specific number emissions range from 10^{12} to 3×10^{16} particles/kg fuel
- Many particles below sizing range of conventional SMPS Emissions of extremely small particles, $D > 3 < 10$ nm, are often more than an order of magnitude higher than emissions of particles for $D > 10$ nm
- There does not seem to be a simple relationship between number and mass emissions

Chemistry and mass emissions

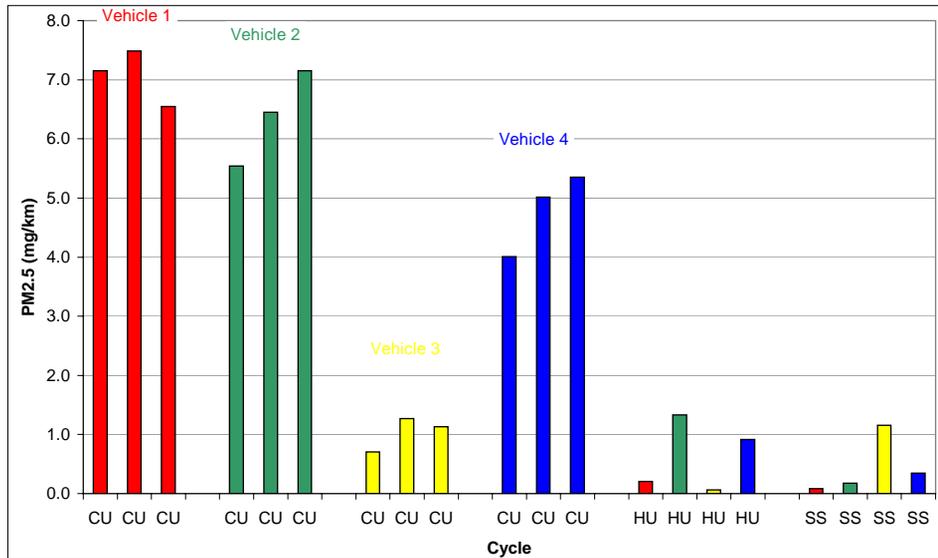

- DOE Chassis dynamometer tests - PM2.5 filter measurements
 - Optimized sampling and dilution system
 - CU – Cold Unified Cycle (0°C start)
 - HU – Hot Unified Cycle
 - SS - Steady State
- Mass emissions from modern gasoline vehicles on cold unified cycles are relatively high, 4 – 7 mg/km
- EC fraction in cold unified cycles 40 to 70%
- Vehicle 3 was an unusual emitter, low mass emissions on cycles, higher mass and number emissions on SS, sulfates?
- There does not seem to be a simple relationship between number and mass emissions

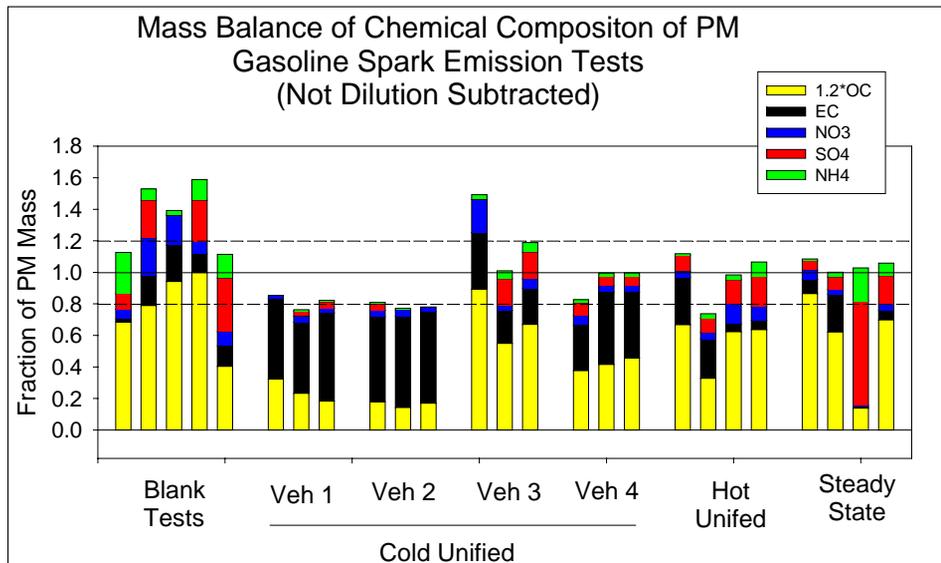



Outline – Spark Ignition PM emissions

- On-road chase
- Chassis dynamometer
 - Physical measurements
 - Chemistry
- **Simulated “smoker”**
- Weekend vs. weekday
- Cold start and idle
- Conclusions

Supplemental Objective – High Emitter

- The objective of this experiment was to simulate the behavior of a worn SI engine with high oil consumption under controlled conditions and measure its emissions
- A worn engine was simulated by the introduction of used lube oil onto the intake valve stems under controlled laboratory conditions. Leaky valve seals are a common cause for high oil consumption
- Properties and characteristics of the exhaust aerosol that were characterized included particle number and length concentrations, and the aerosol number and mass size distributions.

Simulation of a gasoline high emitter by increasing oil flow on intake valve stems

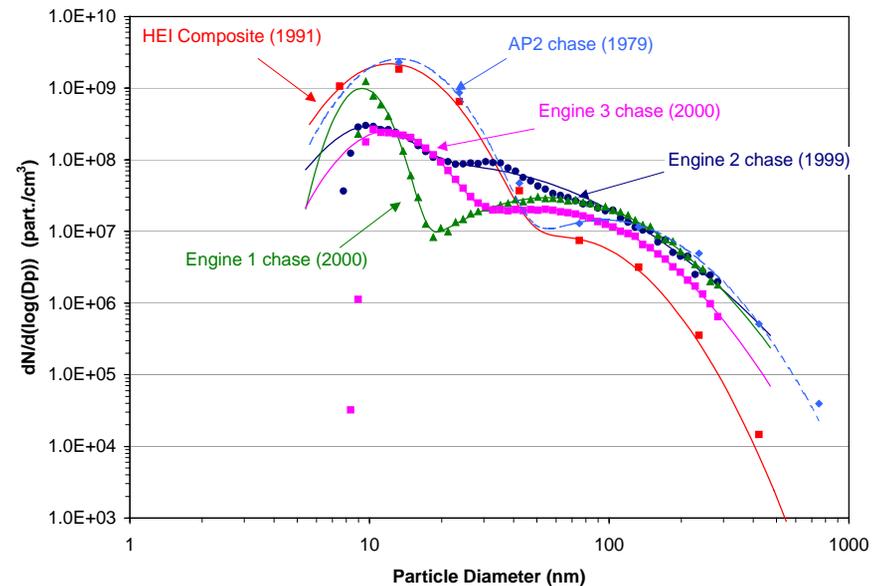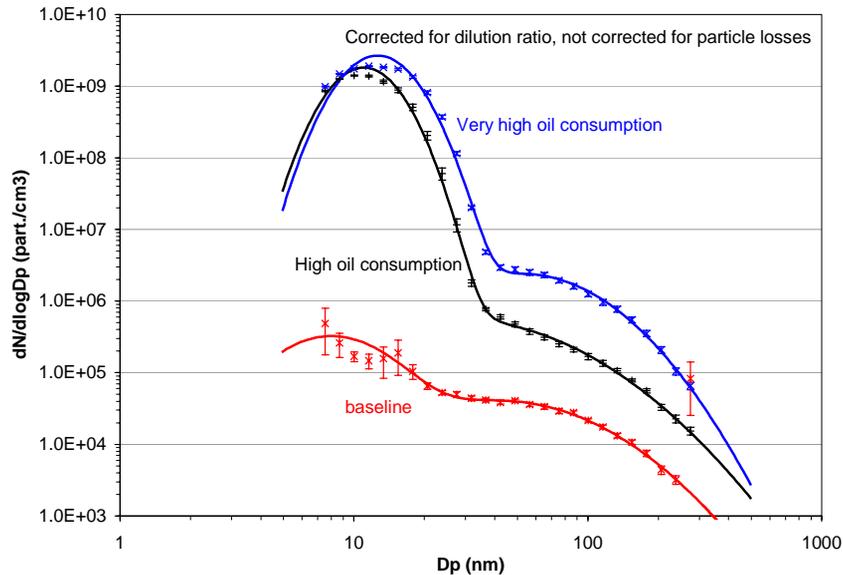

- Figure on upper left shows results of tests of contemporary gasoline engine, baseline and high oil consumption due to leaky valve seals
- Figure on upper right is comparison Diesel figure from the CRC E-43 program on same scale – the nuclei mode of the high emitter approaches levels of older Diesels
- Nuclei mode formation by gasoline high emitter similar to older Diesel engines

Outline – Spark Ignition PM emissions


- On-road chase
- Chassis dynamometer
 - Physical measurements
 - Chemistry
- Simulated “smoker”
- Weekend vs. weekday
- Cold start and idle
- Conclusions

On-Road Characterization of Real World Fleets: Weekday / Weekend On-Highway Apportionment Experiments

- Summertime urban freeway measurements
- Over-the-road aerosol, corrected for the background is contributed by vehicles in proportion to their traffic volume.
- Measuring traffic volumes and aerosol concentrations on days with differing SI to Diesel ratios gives a system of equations that can be solved for average Diesel and SI contribution on a per unit traffic volume basis
- Presented on a fuel specific (per kg of fuel) basis
- Principal uncertainties are in traffic counts and background corrections

Diesel and SI Apportioned Size Distributions on a Fuel Specific Basis

Fuel Specific Contribution to On-Highway Aerosol by Vehicle Type

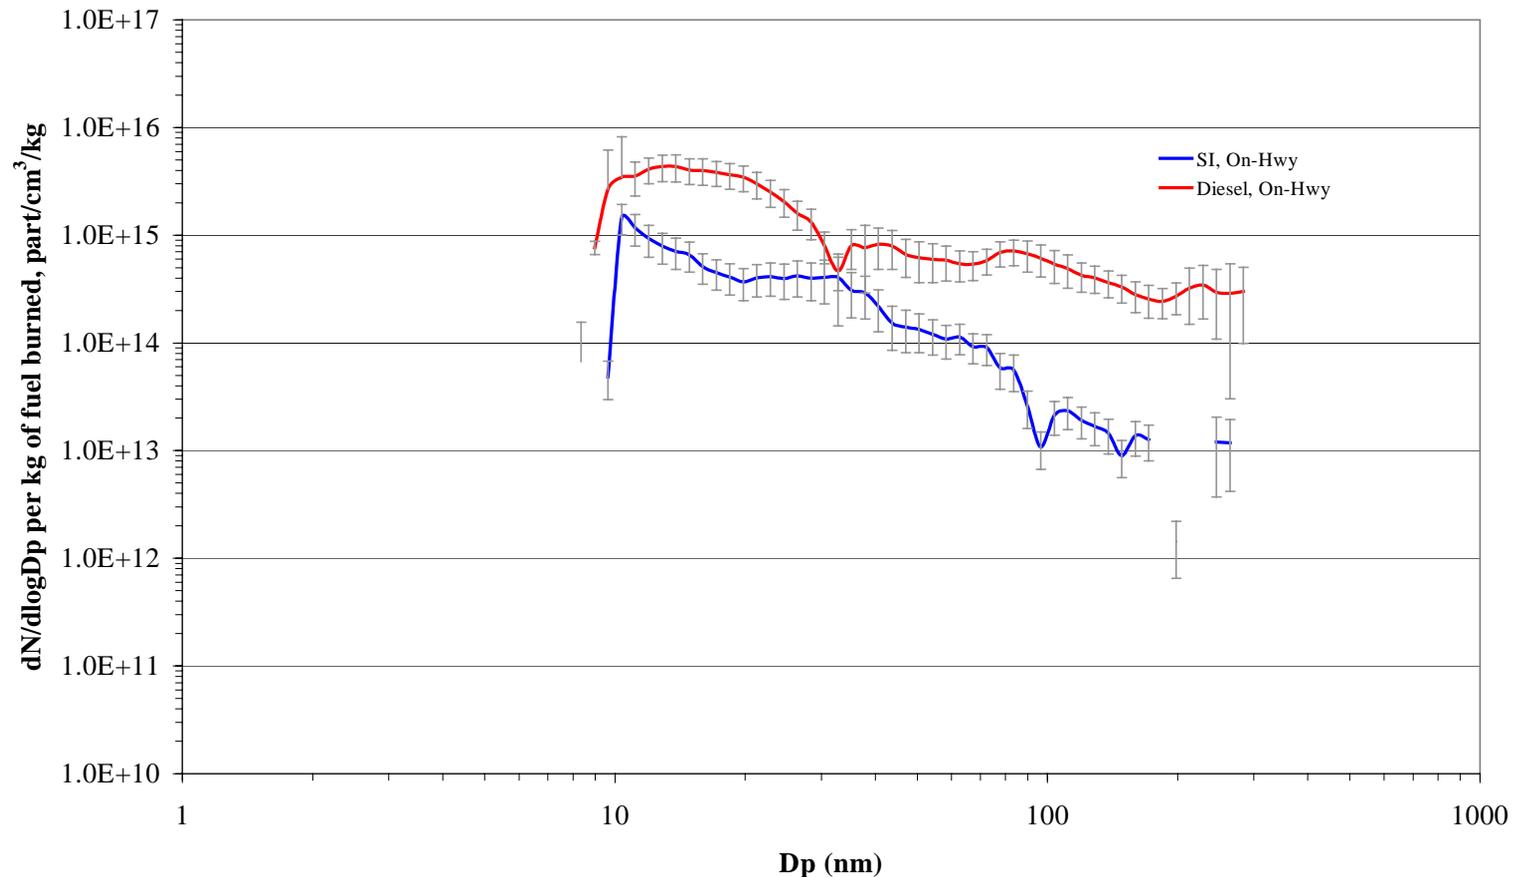

Fuel Specific Emissions – Diesel and SI

Summertime Highway Cruise


Apportioned Source	Dp > 3 nm		Dp > 10 nm		DC ($\mu\text{m}^2/\text{kg}$)		SMPS Active Surface ($\mu\text{m}^2/\text{kg}$)	
	CPC (part/kg)		SMPS Number (part/kg)		Mean	SDOM	Mean	SDOM
	Mean	SDOM	Mean	SDOM	Mean	SDOM	Mean	SDOM
Diesel	1.34E+16	1.86E+15	2.13E+15	3.04E+14	3.15E+12	6.15E+11	1.45E+13	2.15E+12
SI	7.10E+15	1.55E+15	3.88E+14	6.11E+13	1.77E+11	3.91E+10	9.41E+11	1.52E+11

Apportioned Source	PAS (fA/kg)		SMPS Volume ($\mu\text{m}^3/\text{kg}$)		DGN (nm)		DGV (nm)	
	Mean	SDOM	Mean	SDOM	Mean	SDOM	Mean	SDOM
Diesel	2.91E+12	4.04E+11	6.21E+11	1.40E+11	22.7	1.7	195.7	12.1
SI	5.69E+11	1.26E+11	1.44E+10	4.44E+09	19.3	0.7	104.0	24.3

Apportioned Source	N/V Ratio		N_{30}/N Ratio		V_{30}/V Ratio	
	Mean	SDOM	Mean	SDOM	Mean	SDOM
Diesel	3.44E+03	7.76E+02	0.76	0.13	0.008	0.002
SI	2.70E+04	7.69E+03	0.77	0.09	0.059	0.017

Fuel Specific Emissions – Diesel and SI Summertime Highway Cruise

Ratio of fuel specific emissions

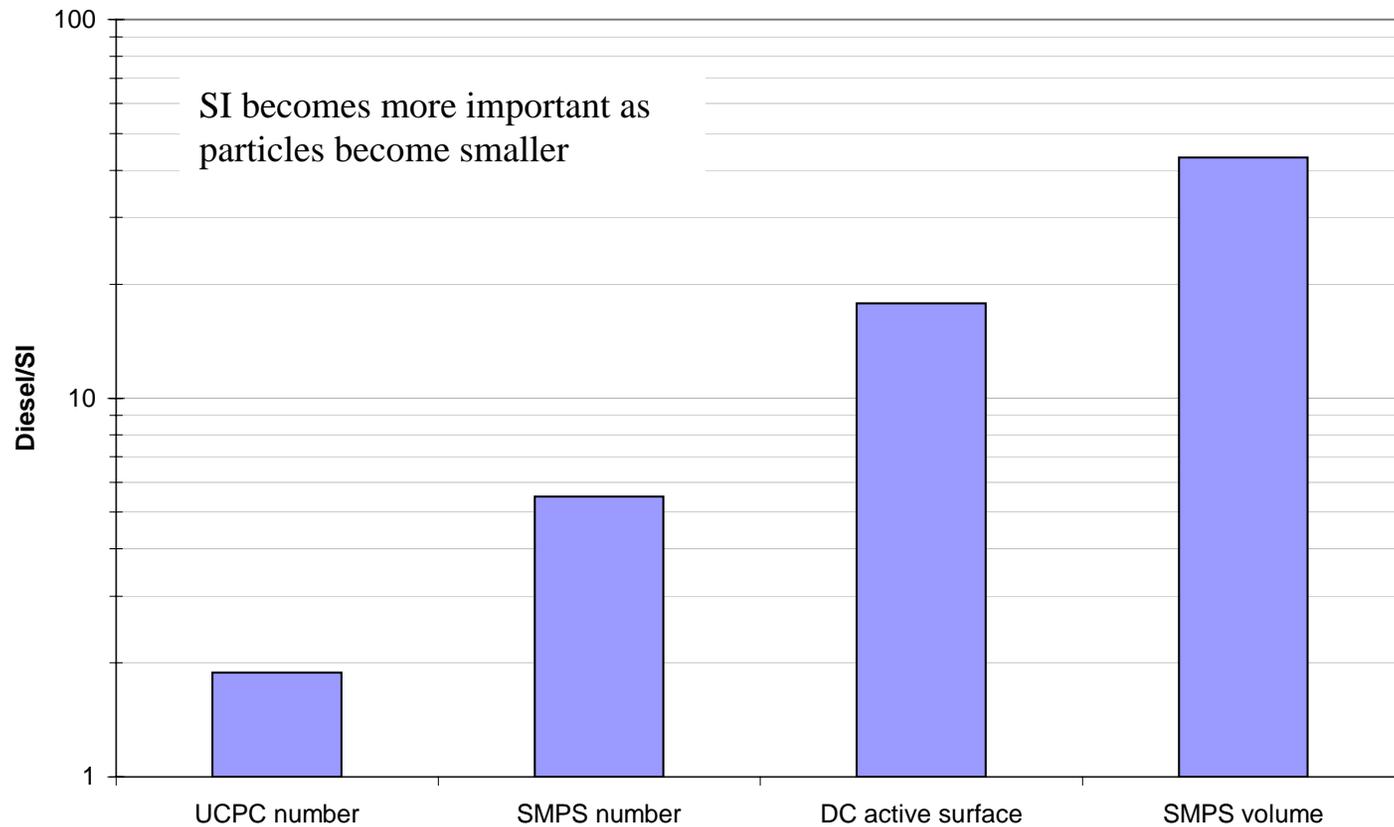

Outline – Spark Ignition PM emissions

- On-road chase
- Chassis dynamometer
 - Physical measurements
 - Chemistry
- Simulated “smoker”
- Weekend vs. weekday
- Cold start and idle
- **Conclusions**